
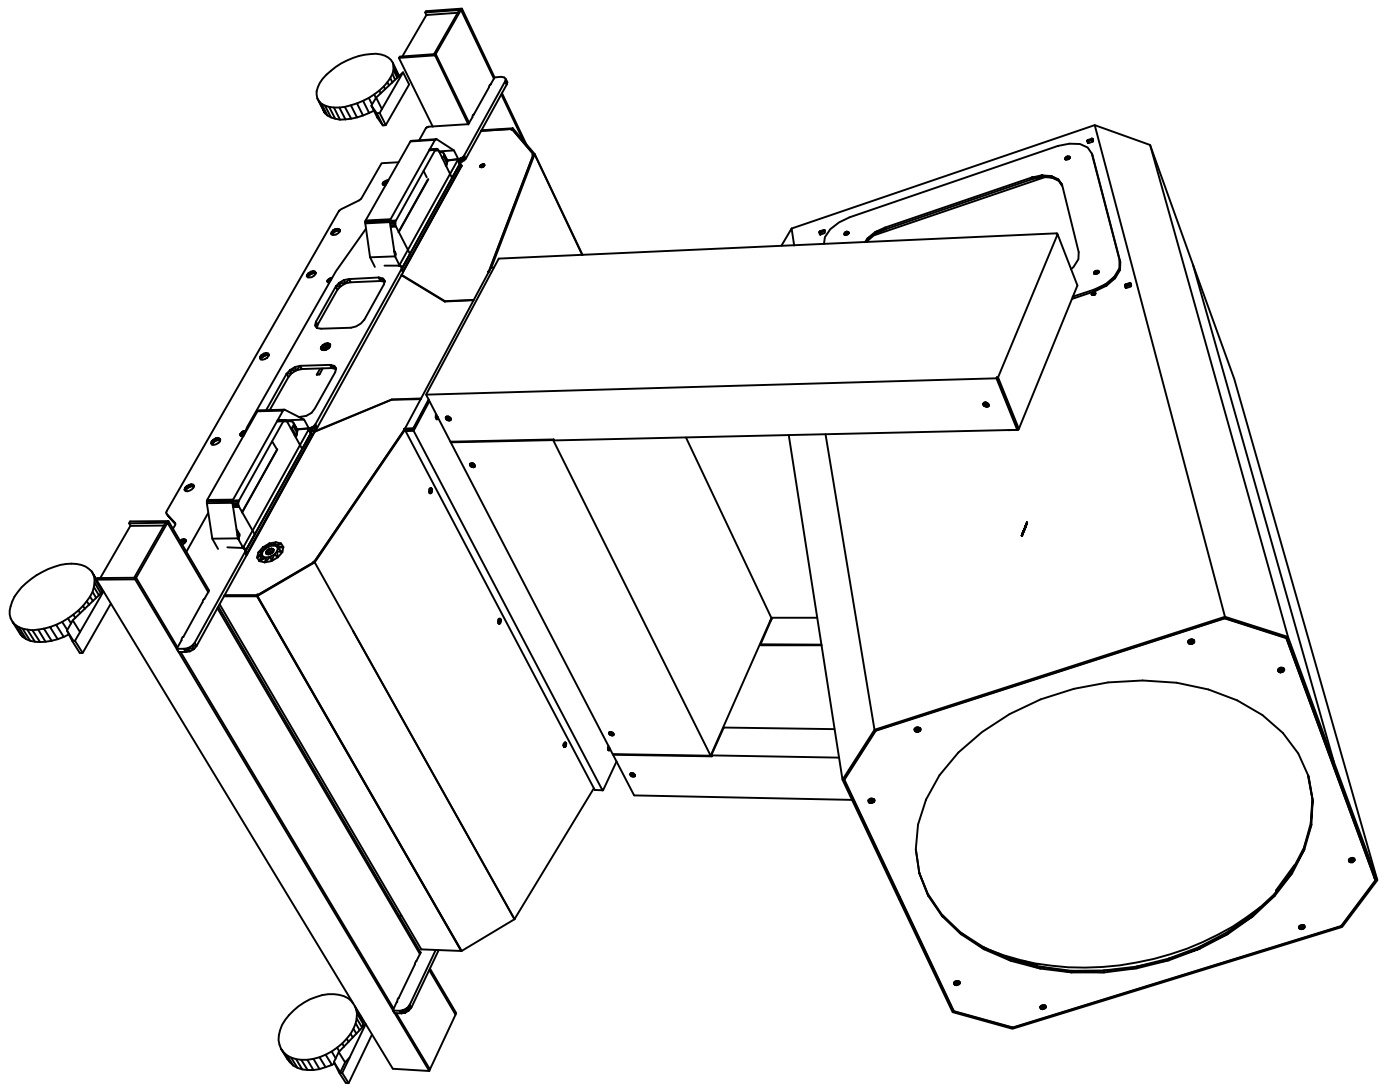
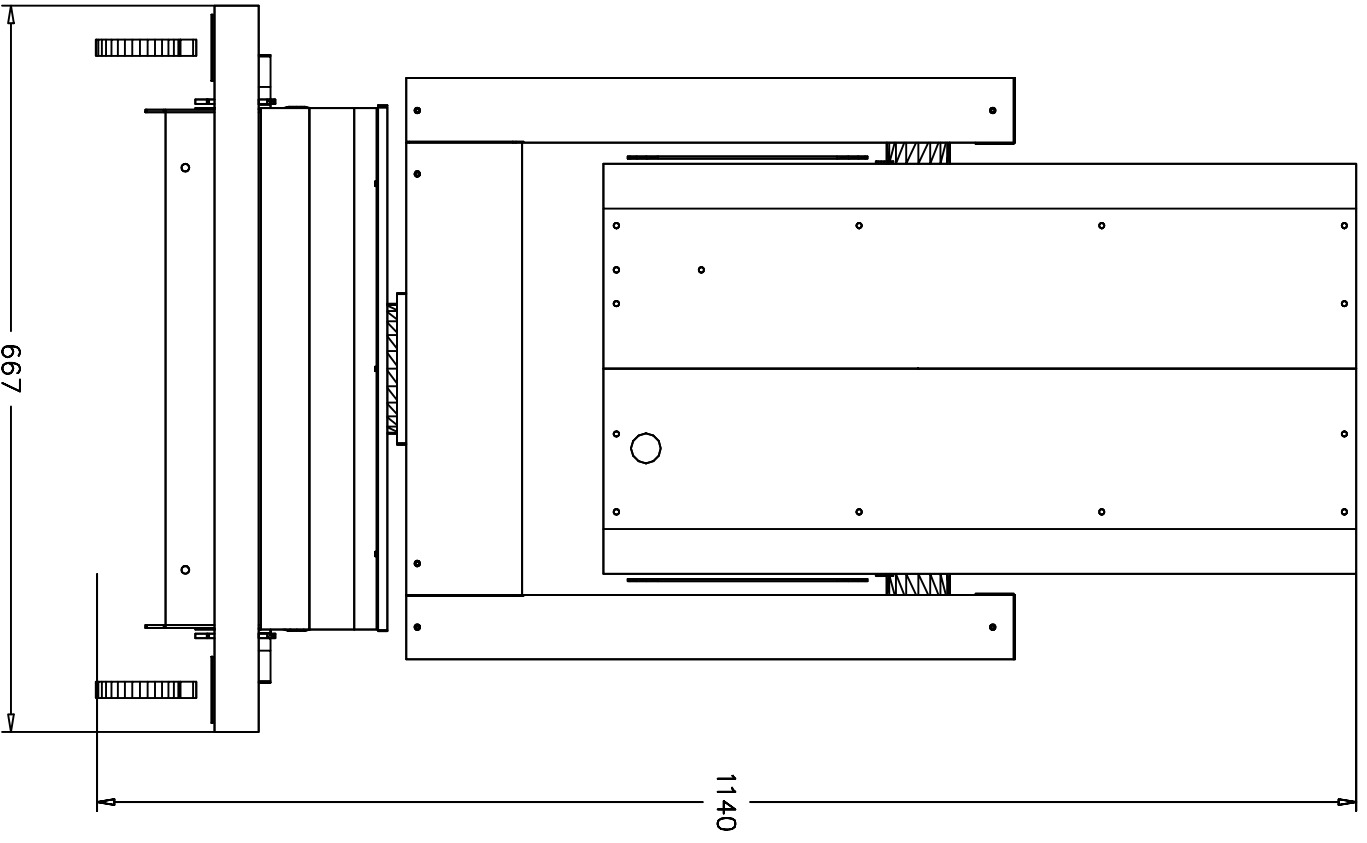
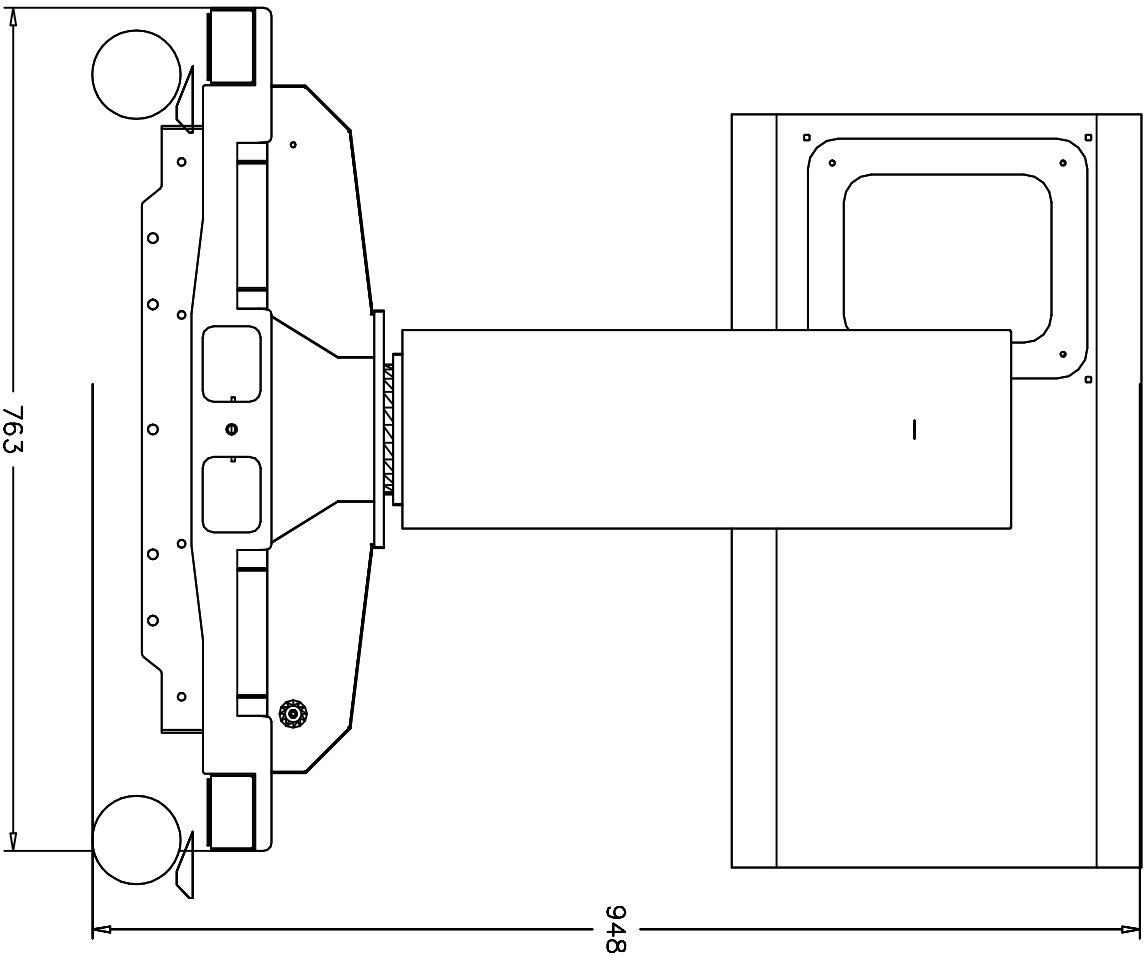


CH.	NAME	DMX 512 VALUE
		0 16 32 48 64 80 96 112 128 144 160 176 192 208 224 240 255
1)	Color Wheel	white yellow green blue magenta red Rainbow Speed
2)	Shutter & Strobo	black Dimmer open open Strobo Speed open
3)	Zoom	20° ← Zoom → 1,8°
4)	Lamp & Reset	Lamp Off Hysteresis Lamp On 
5)	8 bits Pan	-270° 0° +270°
6)	8 bits Tilt	-132° 0° +132°
7)	16 bits Pan	-1° 0° +1°
8)	16 bits Tilt	-50' 0° +50'
9)	Pan speed	max 30' ← Speed → 4,5" (max)
10)	Tilt speed	max 30' ← Speed → 4" (max)
		0 16 32 48 64 80 96 112 128 144 160 176 192 208 224 240 255





HERE ARE SOME GENERAL SPECIFICATIONS ON THE NEW HIGH-GROUND MOVING
YOKE
VERSION:

VOLTAGE: 230 VOLTS

WATTAGE AT 230V: 1.450 WATTS

CURRENT: 6,6, AMPS.

PF: 0,94

WEIGHT OF THE UNIT: KG. 80

WEIGHT OF THE TROLLEY: KG. 6,5

WEIGHT OF THE FLY-CASE: KG. 47

PAN/TILT AUTOMATIC FEEDBACK SYSTEM

LAMP CIRCUIT THERMAL PROTECTION

ELECTRONICS THERMAL PROTECTION

WEATHERPROOF WHEN ON WHEELS: IP RATE 43