




Approximate Lighting Guide

This guide has been designed as a easy, quick reference to important and essential information on our Lighting products.


FIXTURE	LAMP	KG	START UP CURRENT	POWER CONSUMPTION	CHANNELS	HOT RE-STRIKE	DMX CON.
2 Light	2x650w DWE 120v	3.8	N/A	5.4A @ 230V AC	N/A	Tungsten	N/A
8 Light	A1/244	11	N/A	9A @ 230V AC	N/A	Tungsten	N/A
Alpha Beam 300	MSR Gold 300/2 Fastfit	20	3A	2A @ 230V AC	14/18	No	3 or 5 Pin
Alpha Spot 300	MSR Gold 300	21.4	3A	2A @ 230V AC	27	No	3 or 5 Pin
Alpha Wash 300	MSR Gold 300	18.2	3A	2A @ 230V AC	17	No	3 or 5 Pin
Alpha Spot 575	HMI 575 W/S	35.8	6.3A	4A @ 230V AC	28/32	Yes	3 or 5 Pin
Alpha Wash 575	HMI 575 W/S	26	6.3A	4A @ 230V AC	16	Yes	3 or 5 Pin
Alpha Beam 700	MSR Gold 700/2	21	6A	3A @ 230V AC	22/26	No	3 or 5 Pin
Alpha Spot 700	MSR Gold 700/2	23	6A	3A @ 230V AC	25/29	No	3 or 5 Pin
Alpha Wash 700	MSR Gold 700/2	21	6A	3A @ 230V AC	18/21	No	3 or 5 Pin
Alpha Wash 1200	HTI 1200 W/07	32.9	12A	6A @ 230V AC	16	Yes	3 or 5 Pin
Arnet	N/A	2	N/A	0.5A @ 230V AC	N/A	N/A	Ethernet 5 Pin
Atomic Strobe 3000	Xenon	7.5	33A Peak	8A @ 200-240V AC	3/4	N/A	3 or 5 Pin
Barrel	HLX 64625 12v 100w	44	16A	8.3A @ 230V AC	N/A	Tungsten	N/A
Boosters	HMI 2500 GS	57	6.5	6.5A @ 230 V AC	N/A	No	5 Pin
Chroma Bank	LED	11.2	N/A	0.8A @ 230V AC	6/9/36 42/46	LED	5 Pin
Chroma Batten 50	LED	2.8	N/A	0.8A @ 230V AC	6/9/36 42/46	LED	5 Pin
Chroma Cubes	LED	3	N/A	0.8A @ 230V AC	6/9/36 42/46	LED	N/A
Chroma Flood 200	LED	5.3	N/A	0.8A @ 230V AC	3/6/9/10 36/42/49	LED	5 Pin
Chroma Panels	LED	5	N/A	0.8A @ 230V AC	6/9/36 42/46	LED	N/A
Chroma Set Kit	LED	1.6	N/A	9.6A @ 230V AC	6/9/36 42/46	LED	5 Pin
MR16 Set Kit	LED	0.2	N/A	1.2A @ 230V AC	6/9/36 42/46	LED	5 Pin
150mm Spheres	LED	0.7	N/A	0.8A @ 230V AC	6/9/36 42/46	LED	N/A
300mm Spheres	LED	1.5	N/A	0.8A @ 230V AC	6/9/36 42/46	LED	N/A
300mm Strips	LED	0.9	N/A	0.8A @ 230V AC	6/9/36 42/46	LED	N/A
600mm Strips	LED	1.1	N/A	0.8A @ 230V AC	6/9/36 42/46	LED	N/A
900mm Strips	LED	1.3	N/A	0.8A @ 230V AC	6/9/36 42/46	LED	N/A

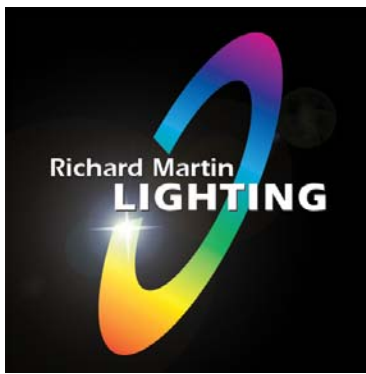

Approximate Lighting Guide

This guide has been designed as a easy, quick reference to important and essential information on our Lighting products.

FIXTURE	LAMP	KG	START UP CURRENT	POWER CONSUMPTION	CHANNELS	HOT RE-STRIKE	DMX CON.
CF7 H EX	MSR 700SA	32	6.8	4A @ 230V AC	20	No	3 or 5 Pin
Colour Block 2	LED	1.3	N/A	2A @ 240V AC	9	LED	5 Pin
Colour Web 250	LED	5.5	Poss 10A	0.2A @ 230V AC	480 per 10	LED	5 Pin
Colour Web Controller	N/A	1.5	Poss 10A	3.2A @ 230V AC	480 per 10	N/A	5 Pin
Contra Pillar	13v 100w 4509	32	N/A	8.3A @ 230V AC	N/A	Tungsten	N/A
Contra Twist	13v 100w 4509	32	N/A	6.5A @ 230 V AC	N/A	Tungsten	N/A
Cosmos Ball	HLX 64625 12v 100w	44	N/A	8.3A @ 230V AC	N/A	Tungsten	N/A
Cyberlite SV	MSR 1200/2	46	12A	6.3A @ 230V AC	20	No	3 Pin
Flight Dome	N/A	20	0.7A	0.3A @ 230V AC	N/A	N/A	N/A
Floor Tumbler	12v 30w	13	N/A	2.4A @ 230V AC	N/A	Tungsten	N/A
Golden Scan 3	HMI 1200 G/S	42.5	12A	6.3A @ 230V AC	6	No	5 Pin
High Ground	HMI 1200S	49	10A	9.5A @ 230V AC	4	No	5 Pin
HMI Gun	HTI 400	12	2A	1A @ 230V AC	N/A	No	N/A
iCove QL	LED	0.2	N/A	0.02A @ 230V AC	3 Chan per Cove	LED	3 Pin
Impression	LED	7.5	N/A	1.5A @ 230V AC	14/10	LED	3 Pin
Impression XL	LED	22	N/A	5A @ 240V AC	14/10	LED	3 or 5 Pin
LED Blinder	LED	17	N/A	0.8A @ 230V AC	6/9/36 42/46	LED	5 Pin
LED Parcans	LED	1	N/A	0.8A @ 230V AC	6/9/36 42/46	LED	5 Pin
LC2140	LED	19.4	N/A	2.8A @ 230V AC	N/A	LED	OVI
Mac 2k Per.	HMI 1200S	42	12A	9.5A @ 230V AC	28/31	Yes	3 or 5 Pin
Mac 250	MSD 250	21	4A	1.6A @ 230V AC	09/11/2013	No	3 Pin
Mac 500	MSR 575/2	32.8	6.2A	3.4A @ 230V AC	12/14/16	No	3 Pin
Mac 600	MSR 575/2	31.5	6.2A	3.2A @ 230V AC	10/12/14	No	3 Pin
Mac 600 (Wide)	MSR 575/2	31.5	6.2A	3.2A @ 230V AC	10/12/14	No	3 Pin
Mac 700	OSRAM HTI 700w/D4/75	34.5	6.3	4.2A @ 230V AC	23/31	Yes	3 or 5 Pin
Mac TW1	1200w Fast Fit	27.4	N/A	5.3A @ 230V AC	14/20	Tungsten	3 or 5 Pin
Magnums	HBO 1000/DE	45	4A	4A @ 230V AC	6	No	5 Pin

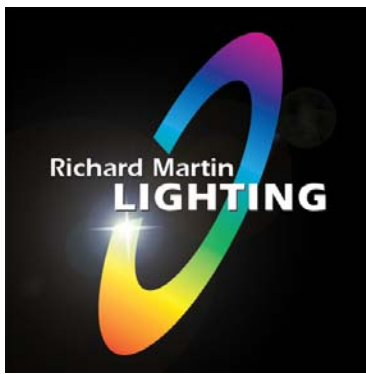

Approximate Lighting Guide

This guide has been designed as a easy, quick reference to important and essential information on our Lighting products.

FIXTURE	LAMP	KG	START UP CURRENT	POWER CONSUMPTION	CHANNELS	HOT RE-STRIKE	DMX CON.
MiniMac Pro	HTI 150	11.8	3.2A	1.1A @ 230V AC	4/8	No	3 Pin
Mini Scan 300	HTI 300DX	10.5	5A	4.5A @ 230V AC	4	No	5 Pin
Mini Scan HPE	HTI 300DX	13	5A	4.5A @ 230V AC	7	No	5 Pin
Moving High Ground	HMI 1200 W/S	85	12A	6A @ 230V AC	10	No	5 Pin
2k Moving High Ground	MSR 2000 SA	97	13A	9.3A @ 230V AC	10	No	5 Pin
MR16 Single	EVF/CG 71A MR16	15	N/A	6A @ 230V AC	N/A	Tungsten	N/A
Nova Flower	OSRAM HMI 1200 W/S	88	12A	6A @ 230V AC	14	No	5 Pin
Pillar	4509 13v 100w	33	N/A	8.3A @ 230V AC	N/A	Tungsten	N/A
Pixelline 1044	LED	11.5	N/A	0.7A @ 240V AC	3/6/9/27 54/62	LED	5 Pin
Pixel Brick 22	LED	1.6	N/A	0.2A @ 240V AC	24	LED	5 Pin
Pixel Par 90s	LED	6.8	N/A	0.5A @ 240V AC	3/4/10	LED	5 Pin
Profile Plus	HMI 1200S	55	12A	8A @ 230V AC	16/17 19	Yes	5 Pin
Solar 575	MSR 575/HR	26	6A	4A @ 230V AC	N/A	No	N/A
Space Flower	STI 3000	70	30A	15A @ 230V AC	6	No	5 Pin
Stage Bar 54s	LED	5.5	N/A	1.1A @ 230V AC	3/4/5/30	N/A	CAT 5/5 Pin
Stage Colour 300	HTI 300DX	22.4	3A	2.6A @ 230V AC	10	No	5 Pin
Stage Light 300	HTI 300DX	22.5	3A	2.6A @ 230V AC	10	No	5 Pin
Stage Zoom 1200	HMI 1200S	45.2	12A	8A @ 230V AC	19	Yes	5 Pin
Twist	4509 13v 100w	31	N/A	6.7A @ 230V AC	N/A	Tungsten	N/A
VL1000 TS	1000w Tungsten	32	N/A	2A @ 230V AC	27	Tungsten	5 Pin
VL2000 Spots	MSR 700SA	25	6.3A	4A @ 230V AC	12/14/15/17	No	5 Pin
VL2000 Wash	MSR 700SA	25	6.3A	4A @ 230V AC	10/12/13/15	No	5 Pin
VL2416	MSR 1200SA	28.6	12A	7-12A @ 180-260V AC	10/12/13/15	No	5 Pin
VL3000 Spot	MSR 1200	38	12A	7-12A @ 180-260V AC	28	No	5 Pin
VL3000 Wash	MSR 1200SA	38	12A	7-12A @ 180-260V AC	28	No	5 Pin
VL3500 Wash	HTI 1500/D7/60	43.5	12A	7-12A @ 180-260V AC	19	No	5 Pin
VL500	1200w Tungsten	19.5	N/A	3-12 @ 100-240V AC	08/10/2013	Tungsten	5 Pin